


# Micro Zenith Solar

Micro Zenith Solar is for stand alone general street lighting installations where main electricity is not available.

- LED Type: High Power, High Efficacy SMD LED
- IP Rating: 65/66
- Luminaire size : 390 x 85 x 55 mm
- Weight : 1.2Kg
- Rugged solar charge controller
- Easy arrangement for pole mounting
- Special Aluminum Die cast fixture with toughened glass
- Automatic ON/OFF
- Easy to install with the help of C clamp
- Pole & Solar Mounting bracket (Optional)

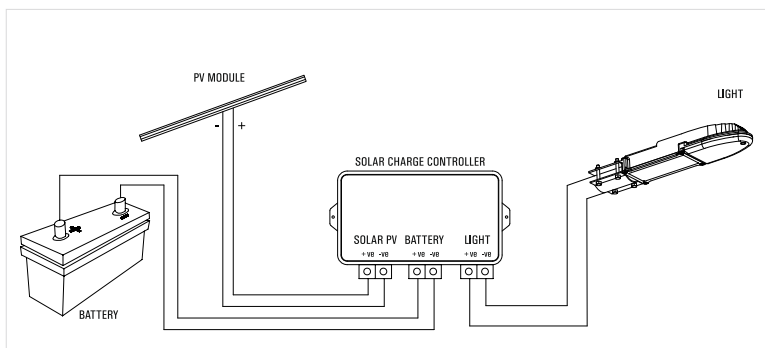

Code	• 107 43 09.18
Input Wattage	• 24W
Battery	• 12 V/ 65 Ah
Solar Panel	• 100W
Autonomy	• 2 Days
Efficiency	• > 85%
Automatic On/Off	• Yes
Total Luminous	• > 2400 lm
Colour Temperature	• CW/WW
CRI	• > 70

Code	• 107 43 09.06
Input Wattage	• 8W (±10%)
Battery	• 12 V/ 40 Ah
Solar Panel	• 40W
Autonomy	• 3 Days
Efficiency	• > 85%
Automatic On/Off	• Yes
Total Luminous	• > 800
Colour Temperature	• CW/WW
CRI	• > 70

\* As per MNRE / DGS & D specifications.

Code	• 107 43 09.09
Input Wattage	• 12W
Battery	• 12 V/ 40 Ah
Solar Panel	• 45W
Autonomy	• 2.5 Days
Efficiency	• > 85%
Automatic On/Off	• Yes
Total Luminous	• > 1200 lm
Colour Temperature	• CW/WW
CRI	• > 70